

Style 50 Split Repair Sleeve



Dual purpose sleeve for emergency repair or hot tapping CIP

Materials of Construction


Consult Factory Per Application

Style 50 With Branch Outlet Size Specifications for 6"- 24"

Pipe Nominal Size* CIP (In)	Outside Diameter (OD)	Length Between End Gaskets (In.)	Maximum Branch Size (In)	Maximum Operating Pressure**
6	6.90	10-1/2	6 IPS	100 PSI
8	9.05	12	8 IPS	
10	11.10	17-1/4	10 IPS	
12	13.20	17-1/4	12 IPS	
16	17.40	21-3/4	16 IPS	
20	21.60	24	20 IPS	
24	25.80	29	24 IPS	

*Dresser Style 50 sleeves may be furnished in sizes up to 48" or larger.

**Other pressures available on request

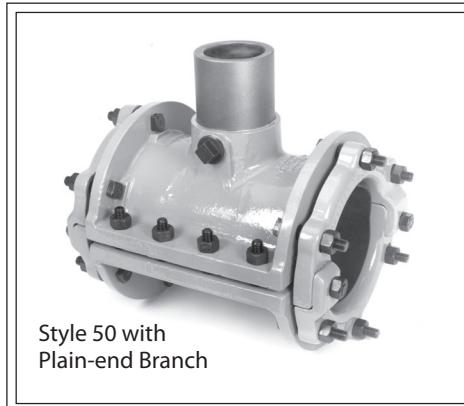

Style 50 with Plain-end Branch

Style 50 Fabricated Size Specifications 6" - 24"

Pipe Nominal Size* CIP (In)	Outside Diameter (OD)	Length Between End Gaskets (In.)	Maximum Operating Pressure**
6	6.90	10-1/2	100 PSI
8	9.05	12	
10	11.10	17-1/4	
12	13.20	17-1/4	
16	17.40	21-3/4	
20	21.60	24	
24	25.80	29	

NOTE: Details and pricing for sleeves with plain, flanged, threaded or Dresser-end branches can be furnished upon request.

SUPPLIED BY:



Anode Engineering Pty Ltd | Engineering Services
P: 1800 446 400
E: admin@anodeengineering.com
www.anodeengineering.com

SUPPLIED BY:



Lordco New Zealand
P: +64 4 939 3944
E: sales@lordco.co.nz
www.lordco.co.nz