

# DRESSER®

## Style 88 Brass Couplings & Fittings

### For Joining Copper Tubing (Seal Only)

Dresser® Style 88 fittings are handy, ready-to-use boltless connectors specially designed for use with copper tubing. Their use eliminates such operations as cutting and squaring of tubing ends, flaring, soldering and brazing. The Dresser sealing principle assures an absolutely tight joint.

Insulating adapter gaskets are also available to adapt Style 90 and Style 65 couplings and fittings to copper tube sizes.


Each Style 88 fitting consists of a brass, malleable or steel body, as usage dictates; two rugged malleable or brass end nuts; and two resilient ARMORED gaskets, protected against damage from threads by gasket retainer cups. Gaskets are made of our exclusive Dresser rubber compound, with helical coil armors. All castings are 100% air-tested to assure a leak-proof seal.

#### At the main...


Connection at the main can be made according to company practice using a Dresser street tee or threaded end street ell. If desired, use a Style 88 coupling for closure.

#### At the curb cock...

The existing curb cock can be reused on copper service renewals by using one Dresser Style 88 male adapter on either side of the cock. Adapters are available for any of the various reductions required.

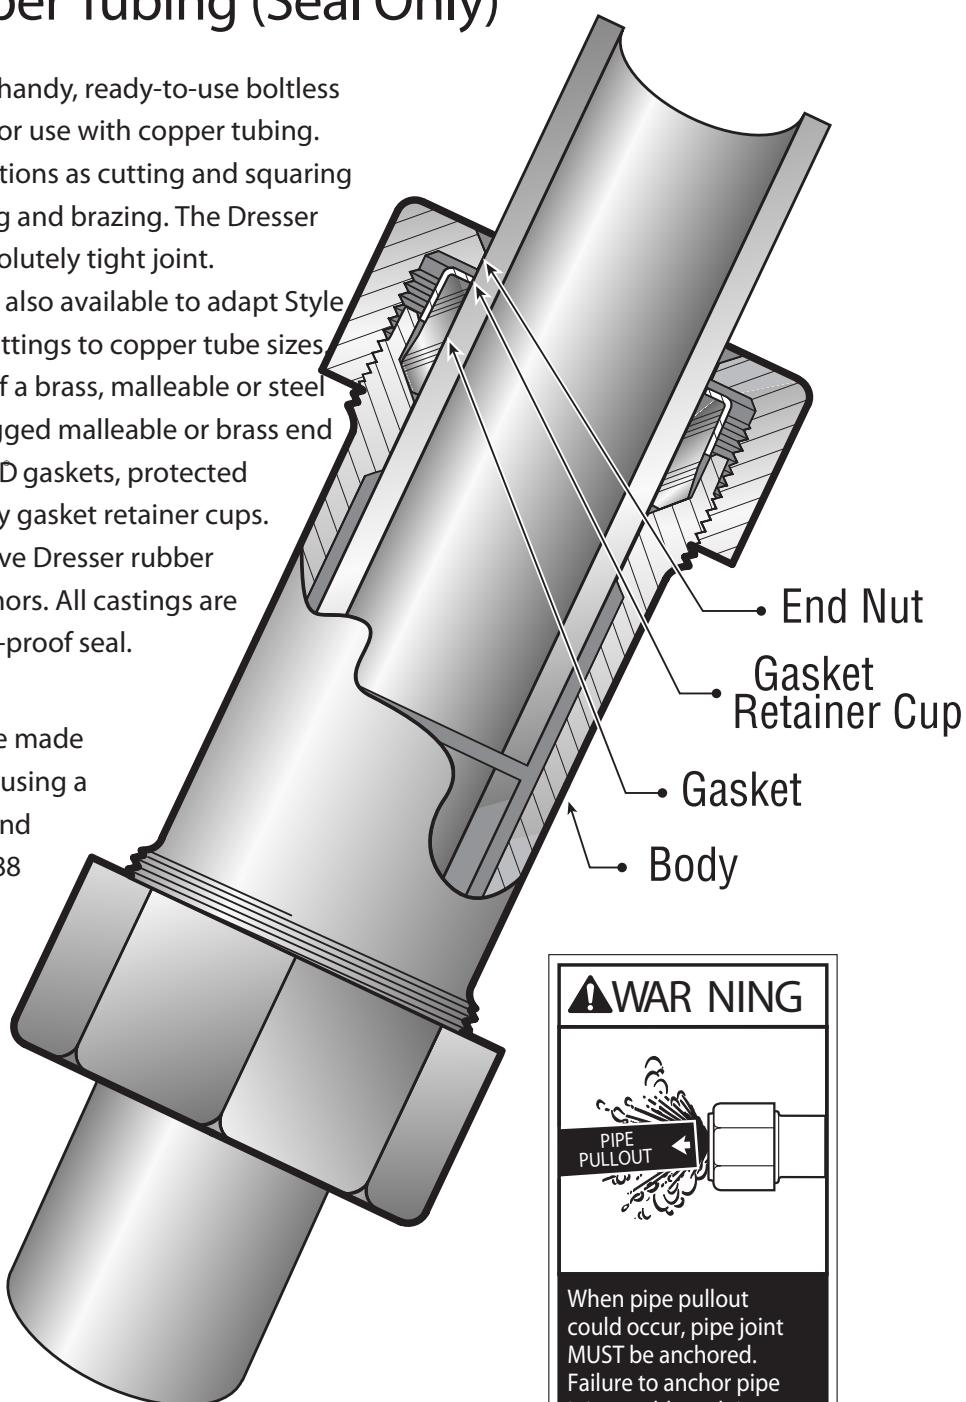

#### WARNING



When pipe pullout could occur, pipe joint **MUST** be anchored. Failure to anchor pipe joint could result in escaping line content and cause property damage, serious injury or death.

#### SUPPLIED BY:



Anode Engineering Pty Ltd | Engineering Services  
P: 1800 446 400  
E: admin@anodeengineering.com  
www.anodeengineering.com

#### SUPPLIED BY:



Lordco New Zealand  
P: +64 4 939 3944  
E: sales@lordco.co.nz  
[www.lordco.co.nz](http://www.lordco.co.nz)